



SPLASH SERIES

IP53 WEATHERPROOF
SOCKET OUTLETS & SURFACE SWITCHES

Data Specification **2026**



AUSTRALIA WIDE DELIVERY
Expedited delivery to all states in Australia



SAME DAY DISPATCH
Orders prior to 12PM will be dispatched the same day



5 YEAR WARRANTY
You can get a trusted 5 Year In House Warranty with CSG

[DESCRIPTION]

DOUBLE SOCKET OUTLETS

The SPLASH Series weatherproof range of surface mounted socket outlets are designed to provide years of trouble free operation in the most extreme weather conditions. Socket outlets are designed to achieve a IP53 protection rating and are rated at 240V AC 10A. The wiring connections come in two configurations, integrated cable connection and pre-wired with line connection separate to each switch allowing for circuit separation. Available in grey and black, and come with a 5 Year InHouse Warranty.

[FEATURES]

- Available in both separately wired and integrated cable connections
- Large toggles ensure convenient ON-OFF switch operation
- Ample Conduit Entries

[TECHNICAL PARAMETERS]

- IP Protection: IP53
- Rated Amperage: 10A and 15A
- Rated Voltage: 250V AC
- Rated Frequency: 50Hz / 60Hz
- Complies with:
AS/NZS 3100:2017+A1
AS/NZS 3112:2017


[APPROVALS]

SAA Approved

[IMAGES]




WPOD10N

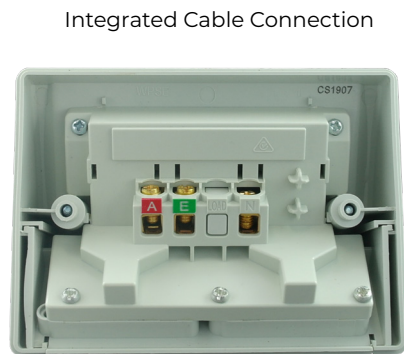

Integrated Cable Connection

WPOD10NC

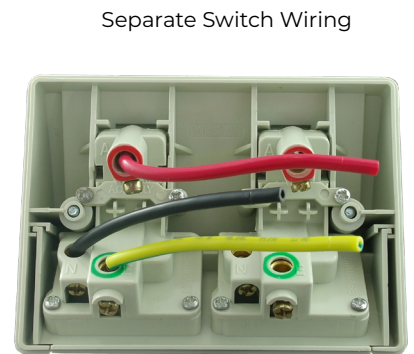

Separate Switch Wiring

WPOD10N



WPOD10



WPOD10NCB



WPOD10XNC

SPLASH

[DESCRIPTION]

SINGLE SOCKET OUTLETS

The SPLASH series weatherproof range of surface mounted socket outlets are designed to provide years of trouble free operation in the most extreme weather conditions. Socket outlets are designed to achieve a IP53 protection rating and are rated at 240V AC 10A. Single socket outlets are available in grey, full size and half size, in both 10A and 15A configurations, and come with a 5 Year InHouse Warranty.

[FEATURES]

- Available in full size and half size
- Large toggles ensure convenient ON-OFF switch operation
- Ample Conduit Entries

[TECHNICAL PARAMETERS]

- IP Protection: IP53
- Rated Amperage: 10A and 15A
- Rated Voltage: 250V AC
- Rated Frequency: 50Hz / 60Hz
- Complies with:
AS/NZS 3133:2013+A1-2
AS/NZS 3100:2017+A1

[APPROVALS]

SAA Approved

[IMAGES]



WPOS10NH



WPOS10N



WPOS10



WPOS15NH



WPOS15N



WPOS10NHB

SPLASH

[SPECIFICATIONS]

Product Code	Description	Rating (Amps)	Length (mm)	Width (mm)	Height (mm)	Conduit Entries
WPOD10	Double GPO Separately Switched	10AX	77	120	85	6 x 25mm, 2 x 20mm
WPOD10N	Double GPO Separately Switched - NEW STYLE	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD10NC	Double GPO Integrated Connection - NEW STYLE	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD10NCB	Double GPO Integrated Connection BLACK - NEW STYLE	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD10XNC	Double GPO + Extra 10A Switch Integrated Connection - NEW STYLE	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD10XNCB	Double GPO + Extra 10A Switch Integrated Connection - NEW STYLE BLACK	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD15N	Double GPO Separately Switched - NEW STYLE	15AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOD15NC	Double GPO Integrated Connection - NEW STYLE	15AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOS10	Single GPO	10AX	77	74	85	4 x 25mm
WPOS10N	Single GPO - NEW STYLE	10AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOS10NH	Single GPO Half Size - NEW STYLE	10AX	84	69	79	5 x 25mm
WPOS10NHB	Single GPO Half Size - NEW STYLE BLACK	10AX	84	69	79	5 x 25mm
WPOS15N	Single GPO - NEW STYLE	15AX	84.5	114.5	80	6 x 25mm, 2 x 20mm
WPOS15NH	Single GPO Half Size - NEW STYLE	15AX	84	69	79	4 x 25mm
WPOS15NHB	Single GPO Half Size - NEW STYLE BLACK	15AX	84	69	79	4 x 25mm

[DESCRIPTION]

SURFACE SWITCHES

The SPLASH Series weatherproof range of surface switches are designed to provide years of trouble free operation in the most extreme weather conditions. Surface switches are designed to achieve a IP66 protection rating and are rated at 240V AC 16A. Available in grey and black, up to 2 gang configurations, and come with a 5 Year InHouse Warranty.

[FEATURES]

- Large toggles ensure convenient ON-OFF switch operation
- 2 Way Switching
- Ample Conduit Entries

[TECHNICAL PARAMETERS]

- IP Protection: IP66
- Rated Amperage: 16AX
- Rated Voltage: 250V AC
- Rated Frequency: 50Hz / 60Hz
- Complies with:
AS/NZS 3133:2013

[APPROVALS]

SAA Approved

[IMAGES]



WS151N



WS152N



WS151NB



WS101



WS102



WS152NB

SPLASH

[SPECIFICATIONS]

Product Code	Description	Rating (Amps)	Length (mm)	Width (mm)	Height (mm)	Conduit Entries
WS101	Single Switch	10AX	77	74	85	4 x 25mm, 1 x 20mm
WS151N	Single Switch - NEW STYLE	16AX	84.5	114.5	80	6 x 25mm, 1x 20mm
WS151NB	Single Switch - NEW STYLE - Black	16AX	84	84	62	3 x 20mm, 4 x 25mm
WS102	Double Switch	10AX	84	69	79	4 x 25mm, 3 x 20mm
WS152N	Double Switch - NEW STYLE	16AX	84.5	114.5	80	4 x 25mm, 3 x 20mm
WS152NB	Double Switch - NEW STYLE - Black	16AX	84	84	62	3 x 20mm, 4 x 25mm

[WARRANTY]

Connected Switchgear SPLASH series of product come with a trusted 5 Year In House Warranty. That means that you have peace of mind knowing that if a fault develops within a five year period, Connected Group Australia will cover the cost of replacing the product and it's installation.*

* See our website for full terms and conditions www.connectedswitchgear.com.au

SPLASH